

# DATA SHEET

## EVOLUTION | 690 L | -45°C | NATURAL GAS



### Reference

BMEVO69086G

### General specifications

Raw volume	690 liters / 24.3 cu.ft. - 4 compartments
Storage capacity	48 000 cryotubes 2mL
Dimensions : externals (H x W x D) internals (H x W x D)	1990 x 875 x 970 mm / 78.4 x 38.2 x 34.5 in. 1436 x 630 x 752 mm / 56.6 x 29.6 x 24.8 in.
Construction : external internal	Electrogalvanised steel with epoxy paint Stainless steel inner tank with rounded corners
Insulation	6 faces Vacuum insulation panel (VIP) and high density polyurethane foam Thermal conductivity < 0.005 W/m/K
Net weight	300 kg / 662 lb.
Standard equipment	3 shelves (maximum weight per shelf: 75 kg / 165 lb) 4 swivel casters 2 levelling feet Key lock (2 keys supplied) Cable port on the back of the device 1 power cord, 2m long
Working temperature	From +18°C (65°F) to +32°C (89°F)
Indoor / outdoor use	For indoor use only
Environnement	Not designed for use in explosive atmospheres (ATEX)
Noise level	Undergoing characterization
Warranty	<ul style="list-style-type: none"><li>• 2 years</li><li>• 5 years : fan, compressors, condenser</li><li>• 10 years : VIP insulation</li></ul>

### Refrigeration system

Cooling engine	1 sealed-compressor in the lower part of the frame Cold production by 5 internal walls
Expansion device	Capillary tube
Refrigerant load	R1270 (CFC, HCFC & HFC free)
Heat rejection	Undergoing characterization
Defrosting method	Manual with heated door-seal and heated valve pit


### Electric and electronic data

Controller type	Plug & play electronic regulator
Temperature probe	1 x Pt100 3 wires probe
List of alarms	<ul style="list-style-type: none"><li>• Configurable high and low temperature and open door alarm</li><li>• Filter alarm, high pressure default, 24V battery back-up, BoSS system activated, CO<sub>2</sub> / LN<sub>2</sub> injection in progress</li></ul>
Types of alarms	Visual (12 LED and pictograms) and acoustic alarms
Remote alarm contact	NO - NC dry contact
Power	< 1000 W
Types of power supply	<ul style="list-style-type: none"><li>• Voltage 230V ~ +/-10%, 50 Hz, fuse protection «aM 12A»</li></ul>

### Performances (ambient temperature : 22°C / 72°F)

Temperature range	From -25°C to -45°C, 1/10th degree display
Cooldown time from 20°C to -40°C	+/- 4 hours
Uniformity at -40°C	+/-3°C
Stability	+/-1°C

Management interface	
Type of interface	Touch screen for easy navigation indicator with USB port for data collection
Type of menu	<ul style="list-style-type: none"> <li>• «Diagnostics» for real-time informations about the freezer</li> <li>• «Statistics» for an overview of the figures related to the conditions of use</li> <li>• «Eco» to minimize the power consumption</li> <li>• «Infos» with serial number, gas load, BTU information</li> </ul>
Security	<ul style="list-style-type: none"> <li>• Settings protected by password</li> <li>• Key locked freezer</li> <li>• Delay for compressors restarting after power outage</li> </ul>
Options and conformities	
Options	<ul style="list-style-type: none"> <li>• Cryo-accumulators (recovery time multiplied by 2)</li> <li>• CO<sub>2</sub> / LN<sub>2</sub> backup system (150 bar max electrical valve)</li> <li>• Additional Pt100 ohms 3 wires</li> <li>• Thermocouple K probe</li> <li>• Temperature sensor delivered with its certificate of conformity</li> <li>• 4-20mA output</li> <li>• COFRAC 9 points temperature mapping</li> <li>• IQ / OQ documentation</li> <li>• Padlock closure</li> </ul>
Supplied with	<ul style="list-style-type: none"> <li>• User manual</li> <li>• Detachable washable filter</li> <li>• Ice scraper</li> </ul>
Certification / Conformities	<ul style="list-style-type: none"> <li>• EN61010-1 – Safety requirements for electrical equipment for measurement, control and laboratory use - Part 1: General requirements</li> <li>• 2014/35/UE – Low voltage directive</li> <li>• 2014/30/UE – EMC directive, Class A device</li> <li>• 97/23/CE – Under pressure devices</li> </ul>
Shipping	
Shipping dimensions (H x W x D)	2150 x 940 x 1170 mm / 84.7 x 37 x 46.1 in.
Shipping weight	333 kg / 734 lb.
Type of package	Delivered on pallet with unloading ramp
Storage elements	
	Full range of storage elements available

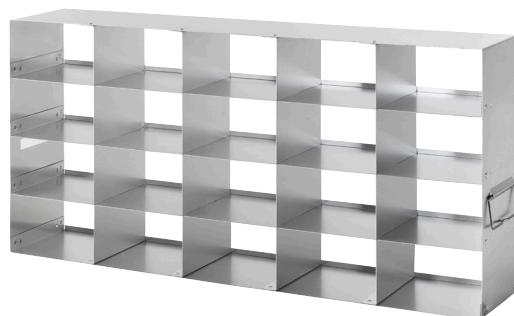

©2021 Froilabo. All rights reserved.

FROILABO freezers are designed in France and made in E.U.

The specifications and technical data presented in this datasheet are those in our possession on the date of emission. FROILABO reserves the right to make, without notice, any modifications to its products, specifications, colors, materials and technical data, or to interrupt the manufacture of the freezers.

Despite the care taken in its realization, this product sheet does not constitute a contractual document.

For more informations, go to sur [www.froilabo.com](http://www.froilabo.com).

FP\_BMEV069045G/EN\_rev1.0 | 01/2021

Headquarter address : Froilabo, 5 avenue Lionel Terray 69330 Meyzieu, France